



SHOP EQUIPMENT



- VEHICLE LIFTS ◆ WHEEL ALIGNMENT ◆ JACKS AND ACCESSORIES ◆ WELDERS AND PLASMA CUTTERS
- BATTERY MAINTENANCE
 ELECTRONIC SYSTEM DIAGNOSTICS
 SYSTEM EVACUATION STATIONS
- PARTS AND PRESSURE WASHERS
 AIR COMPRESSORS
 TOOL BOXES AND WORKSTATIONS







3-Stage front arms provide greater overall arm sweep for asymmetric or symmetric lifting in the same service bay.



Padded overhead shut off system prevents vehicle damage from being raised too high.



Wide rubber door guards protect vehicle doors from damage.

ASYMMETRIC AND SYMMETRIC PROFESSIONAL GRADE 10,000 LB. CAPACITY 2-POST LIFT

- Heavy-duty 2-stage arms enable heavy-duty symmetric lifting up to 3,000 lb. per arm
- Adjustable double telescoping screw pads minimize the need for adapters
- * Padded overhead shut off system prevents vehicle roof damage
- Single-point mechanical lock release system disengages both column locks simultaneously
- Wide rubber door guards protect vehicle doors from damage
- 11' 11-7/8" Standard height allows lift to be placed in service bay with 12' ceiling
- Premium powder coat finish provides long-lasting durability
- Plated arm restraints and arm pins inhibit rust and provide long-lasting durability
- 1-Year parts and labor warranty

LF210000E \$3,339.99 REG \$3,516.99

2' COLUMN HEIGHT EXTENSION 03629-E10EH2 \$379.99 REG \$399.99

*Installation not included



LF2CL10V3

10,000

74%

11'8"

11'11'

11' 2-1/2"

11'6-1/2'/11'11'

100' / 104-1/2'

Min. 19-13/16" / Max. 42"

208v-230v (Single Phase Std.)

Min. 37-5/8" / Max. 60"

Adj. 3-7/8" - 6-1/8"

110' / 114-1/2'

2,500



Offset front arms provide easier spotting to lift points and safely lift both symmetrically and asymmetrically within the same service bay.



48" Elongated carriage design decreases load on bearing.



Oversized 5" diameter pulley and heavy-duty 5/16" cable reduces stress on equalization system and increases cable life.

ASYMMETRIC AND SYMMETRIC Professional grade 10,000 LB. Capacity 2-post lift

SPECIFICATIONS

LIFTING CAPACITY (LB.)

CYLINDER OVERALL (FULL STROKE)

RI SE HEIGHT

COLUMN HEIGHT

WIDTH OVERALL

DRIVE-THRU CLEARANCE

FLOOR TO OVERHEAD SWITCH

FRONT ARM REACH (MIN /MAX.)

REAR ARM REACH (MINJMAX.)

SPEED OF RISE (SECONDS)

MAX. LOAD PER ARM LB.)

CEILING HEIGHT REQUIRED

SCREW PAD HEIGHT

INSIDE COLUMNS

MOTOR

VOLTAGE

- Offset 3-stage front arms + 3-stage rear arms provide the greatest overall arm sweep to meet the widest range of vehicle pickup points
- 11' 8" Standard height can be placed in standard service bay with 12' ceiling
- Available 2' and 3' column extensions enable technician to work at an ergonomic height when servicing taller vehicles
- Double telescoping screw pads adjust to multiple heights minimizing the need for adapters
- 48" Elongated carriage design decreases load on bearing
- Heavy-duty 5" diameter pulley and 5/16" cable reduces stress on equalization system and increases cable life
- Single-point mechanical lock release system allows technician to disengage both column locks simultaneously
- Fully gusseted base plate design reduces column deflection

LF2CL10V3 \$4,695.99 REG \$4,943.99

*Installation not included

nac Tools



arms provide excellent reach

vehicle lifting points.

and retraction to accommodate



Padded overhead shut off system prevents vehicle damage from being raised too high.



13' 10" or 14' 7" Adjustable column height accommodates higher profile vehicles and provides maximum headroom to work under vehicles.

avy-duty symmetric	SPECIFICATIONS	LF212000V
ns provide excellent	Lifting capacity (lb.)	12,000
te vehicle lifting points	Rise height	78-1/8*
niki - ilihar kiliku munan manan dan pilan ilihan m	Orlinstable height grerall	13'10"/14'7"
n height accommodates	MICH CONTRACT	11' 7-3/4"
maximum headroom to	Drive-thru clearance	103"
	Floor to overhead switch	13' 3-1/2" / 14' 1/2"
revents vehicle damage	Arm reach (min.)	35-3/4"
	Arm reach (max.)	54-1/2"
TO STATE OF THE ST	Screw pad height	5-1/4" - 7-1/4"
e system allows	Inside columns	115"
ın locks	Motor (hp)	2HP, Single Phase, 60HZ
	Voltage	208 - 230v
from door damage	Speed of rise (seconds)	66 sec.
	Max. Load per arm (lb.)	3,000 lb.

Ceiling height required





Set of 4 frame engaging truck adapters Frame engaging adapters are REQUIRED when lifting vehicles with frame construction.



2 Organizer racks for adapter extensions

4 High

extensions

SYMMETRIC 12,000 LB. CAPACITY 2-POST LIFT

- Heavy-duty 2-stage arms enable hea lifting up to 3,000 lb. per arm
- Heavy-duty 2-stage telescoping arm reach and retraction to accommoda
- 13' 10" or 14' 7" Adjustable column higher profile vehicles and provides work underneath vehicles
- · Padded overhead shut off system pr from being raised too high
- · Single-point mechanical lock releas technician to disengage both colum simultaneously
- * Rubber door guards protect vehicle

LF212000V \$4,899.99 REG \$5,164.99

2' COLUMN HEIGHT EXTENSION 03629-E12EH2 \$569.99 REG \$599.99

*Installation not included

Mac Tools




- · Single point air actuated lock release allows technicians to disengage column locks simultaneously
- Arm restraints automatically disengage when lift is fully lowered for easy positioning of arms and securely engage when lift is raised
- . Oversized steel pulley reduces stress on equalization system for increased durability
- 60" Lifting carriage lessens column stress by dispersing load, resulting in longer lift
- Standard combination stack screw pads/ extensions accommodate a wide range of vehicle lift points
- · Padded overhead shut off system prevents vehicle damage from being raised too high
- Single-point air actuated lock release system.

LF2HD12000 \$7,599.99 REG \$7,999.99 LF2HD15000 \$13,899.99 REG \$14,654.99 LF2HD18000 \$14,659.99 REG \$18,999.99 SAVE \$4,340

*Installation not included













Heavy-duty front bearing and yoke assemblies distribute contact load to reduce column stress for longer product life.



Fully gusseted base plate design reduces column deflection and makes lift less sensitive to uneven floors.

SPECIFICATIONS



Single point air actuated mechanical lock release allows technician to disengage columns simultaneously.

LF4AR4015XAX

LF4AR4015EA0

LF4AR4015XAO

MEDIUM DUTY 15,000 LB. CAPACITY ALIGNMENT RACK 4-POST LIFT

- 78" Rise height the highest rise in the industry
- Recessed stainless steel turning radius gauges provide accurate readings
- Single-point air-actuated lock release disengages all column locks simultaneously
- Oversized solid machined steel pulleys for prolonged pulley and cable life
- 14 Level locking positions for a variety of alignment and general service tasks

Alignment Models Include:


- Two 7,500 lb. rolling jacks, internal air line system for dual rolling jacks, flush mount stainless steel turning radius gauges, rear slip plates, multiposition work-steps, automatic wheel stops
- 80" Rear recessed free floating slip plates offer a wider range of 4-wheel alignment capacities
- Compatible with the industry's latest camera imaging alignment systems

LF4AR4015EAX \$18,589.99 REG \$19,568.99 LF4AR4015XAX \$19,569.99 REG \$20,598.99 LF4AR4015EA0 \$19,949.99 REG \$20,998.99 LF4AR4015XAO \$19,949.99 REG \$20,998.99

SAVE	\$979
SAVE	\$1,029
SAVE	\$1,049
SAVE	\$1,049

LIFTING CAPACITY (LB.)	15,000	15,000	15,000	15,000
OPEN / CLOSED FRONT	Closed	Closed	Open	Open
MAX. WHEELBASE	182-1/2"	210"	182-1/2"	210"
MAX. 2 WHEEL ALIGNMENT	166-1/2	194"	166-1/2"	194"
4 WHEEL ALIGNMENT	88" - 158"	88" - 158"	88" - 158"	88" - 158"
RISE HEIGHT	78"	78"	78"	78"
LENGTH OVERALL	20' 4-1/2"	22' 8"	20' 9"	23"
WIDTH OVERALL	11' 2-1/2"	11' 2-1/2"	11' 10" front - 11' 2-1/2" rear	11' 10" front - 11' 2-1/2" rear
INSIDE COLUMNS	120"	120"	120"	120"
HEIGHT OF COLUMNS	93-1/2"	93-1/2"	99-1/2" front - 93-1/2" rear	99-1/2" front - 93-1/2" rear
WIDTH OF RUNWAYS	20"	20"	20"	20"
HEIGHT OF RUNWAYS	7"	7"	7"	7"
WIDTH BETWEEN RUNWAYS (MIN. / MAX.)	40" / 43"	40" / 43"	43"	43"
AIR SUPPLY REQUIRED (PSI)	90-120 psi	90-120 psi	90-120 psi	90-120 psi
MOTOR (HP)	2HP	2HP	2HP	2HP
VOLTAGE (1 PHASE STD.)	208V-230V	208V-230V	208V-230V	208V-230V
SPEED OF RISE (SECONDS)	85 sec.	85 sec.	85 sec.	85 sec.
MIN. RECOMM. BAY SIZE	12' x 24'	12' x 26'	12' x 24'	12' x 26'


LF4AR4015EAX

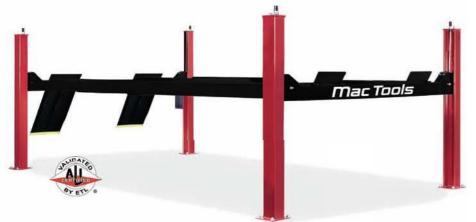

SPECIFICATIONS	LF412000-182	LF412000-210
LIFTING CAPACITY (LB.)	12,000	12,000
MAX. WHEELBASE	182-1/2"	210"
RISE HEIGHT	78"	78"
LENGTH OVERALL	20' 4-1/2"	22' 8"
WIDTH OVERALL	10' 10-3/4"	10' 10-3/4"
INSIDE COLUMNS	116"	116"
BETWEEN COLUMNS	16' 4"	18' 7-1/2"
HEIGHT OF COLUMNS	90-1/2"	90-1/2"
WIDTH OF RUNWAYS	20"	20"
HEIGHT OF RUNWAYS	7"	7"
WIDTH BETWEEN RUNWAYS (MINIMUM/MAXIMUM)	40" / 43"	40" / 43"
AIR SUPPLY REQUIRED	85-120psi	85-120psi
MOTOR	2HP	2HP
VOLTAGE(1 PHASE STD.)	208-230V	208-230V
SPEED OF RISE	70 sec.	70 sec.
MINIMUM RECOMMENDED BAY SIZE	12' x 24'	12" x 26"



78" Rise height, the highest rise in the industry, provides maximum head room for working under neath vehicles.



Louvered approach ramps provide tire traction for drive-on.



ROLLING AIR/HYDRAULIC JACK

6,000 lb. Capacity air/ hydraulic rolling jack.

03629-RJ6 \$2,394.99

REG \$2,520.99



ROLLING AIR JACK

6,000 lb. Capacity air only operation rolling jack.

03629-RJAB6 \$3,423.99

REG \$3,603.99


MEDIUM DUTY 12,000 LB. CAPACITY FLAT DECK 4-POST LIFT

- 79" Rise height the highest rise in the industry
- Durable non-skid surfaces for positive vehicle traction and technician safety
- Fully gusseted base plate reduces column deflection and is less sensitive to uneven floors
- Oversized solid machined steel pulleys for prolonged pulley and cable life
- * 2-Year parts and 1-year labor warranty

LF412000-182 \$5,995.99 REG \$6,998.99 SAVE \$1,003 LF412000-210 \$6,299.99 REG \$7,298.99 SAVE



*Installation not included







- Free-standing or bolt-down option
- Formed runways with rail system, and single hydraulic cylinder
- · Adjustable internal lock ladder for lift leveling
- · Backup slack cable system provides additional security

LF49000H \$4,219.99 REG \$4,443.99 **LF49000X \$4,464.99** REG \$4,699.99 LF49000W \$4,464.99 REG \$4,999.99

*Installation not included







Electric motor mounted on tow dolly provides convenience and ease of maneuverability.



Sliding/rotating arm design reaches pick-up points on a wider range of vehicles.

SPECIFICATIONS	LFMR6
LIFTING CAPACITY (LB.)	6,000
RISE HEIGHT	52-13/16"
LENGTH OVERALL	8' 3"
WIDTH OVERALL	39-1/2"
MIN. COLLAPSED HEIGHT	5-1/2"
PAD HEIGHT (MINIMUM)	7-1/2"
PAD HEIGHT (MAXIMUM)	61"
HYDRAULIC HOSE	12'
SAFETY LOCK POSITIONS	7
ELECTRIC MOTOR	1HP
VOLTAGE	115∀
SPEED OF RISE	45 sec.
MIN. RECOMMENDED BAY SIZE	10' x 22'

PORTABLE 6,000 LB. CAPACITY MID-RISE LIFT

- Portable mid-rise lift with heavy-duty tow dolly provides flexibility to service vehicles anywhere, inside or out
- 7 Locking positions allow technician to work at an ergonomic height to increase productivity and minimize fatigue
- Electric motor mounted on tow dolly provides convenience and ease of maneuverability
- Single push button power unit with release valve provides convenience when lifting and lowering vehicles
- Slip-on rubber pad adapter kit with height extension accommodates high-profile vehicles
- Sliding/rotating arm design accommodates meeting pick-up points on a wider range of vehicles
- 110V Operation
- 1-Year parts and labor warranty

LFMR6 \$2,366.99 REG \$2,629.99

*Installation not included



10,000 LB. CAPACITY SHORT RISE LIFT

- Short-rise pad lift comes standard with (4) two-position adapter blocks for increased vehicle spotting versatility
- . Standard storage trays are conveniently placed on each side of the lift to prevent lug nuts and other small parts from being misplaced
- Dual cylinders provide stable 10,000 lb. lifting capabilities to accommodate a wide range of vehicles
- Diamond plate approach ramps help to prevent slipping
- 3 Locking positions allow technician to work at their ergonomic working height to increase productivity and minimize fatigue



SPECIFICATIONS	LFSRM10				
LIFTING CAPACITY (LB.)	10,000				
RAISED HEIGHT	22"				
LOWERED HEIGHT	4-1/4"				
LOCKING BAR HEIGHTS	13-3/4", 18-3/8", 21-1/4"				
LOW ADAPTER POSITION	4-3/4"				
HIGH ADAPTER POSITION	6-3/4"				
OVERALL WIDTH	7' 1"				
OUTSIDE WIDTH OF PLATFORMS	72"				
WIDTH BETWEEN PLATFORMS	23"				
PLATFORM OVERALL LENGTH	50"				
RAMP & PLATFORM OVERALL Length	77-3/4"				
OVERALL LENGTH	7' 6-1/2"				
REARWARD MOVEMENT	13-1/4"				
MOTOR	1HP, Single Phase, 60Hz				
VOLTAGE	115V				

MOTORCYCLE / ATV / UTV LIFTS

- Precision formed platforms and scissor arms
- Integrated base for stability and smooth operation
- Front and rear drop downs provide quick access to wheels (LFQML01A features rear drop down only)
- Multiple lock positions
- Solid approach ramp standard





LFQML1750A \$2,299.99 REG \$2,349.99

*Installation not included



2,000 LB. CAPACITY MOTORCYCLE LIFT

Shown with optional deluxe wheel clamp (03629-QML01WC) and center jacks (03629-QML01CJ).

LFQML02E \$3,233.99 REG \$3,299.99

*Installation not included

SPECIFICATIONS	LFQML01A	LFQML1750A	LFQML02E
LIFTING CAPACITY (LB.)	1,000	1,750	2,000
MAX RAISED HEIGHT	35"	40"	47-1/4"
LOWERED HEIGHT	7-1/4"	8"	7-1/4"
PLATFORM WIDTH	24"	29-1/2"	29-1/2"
PLATFORM LENGTH	84"	86-1/2"	86-1/2"
ELECTRIC/HYDRAULIC Power Unit	N/A	N/A	110V Power Unit
AIR SUPPLY REQUIRED	85-115 psi	85-115 psi	N/A



1,000 LB. CAPACITY MOTORCYCLE / ATV / UTV LIFT

(Shown with optional ATV side panels)

LFQML01A \$1,759.99 REG \$1,799.99

*Installation not included



TIRE MOUNTING MACHINES





TIRE CHANGER WITH PRESS ARM

- Unique press arm design allows the technician to change virtually any tire and wheel assembly
- The press arm offers the best solution for all mounting operations
- Three-section, articulated arm follows the turntable rotation keeping the bead constantly pressed below the drop center
- The bead pressure pad is made of a unique rubber material developed to track at the proper position between the tire and the rim
- * Turntables are electric powered
- · Jaws are air powered

TC2500 \$7,649.99 REG \$8,999.99





TIRE CHANGER WITH SWING ARM

The perfect choice for gas stations, small garages, auto salvage yards and shops requiring basic tire changer needs. This high quality tire changer has the ability to serve both light trucks and all standard SUV's as well as specialty vehicles such as motocycles.

- Tubeless inflator device directly injects air through jets on each clamp
- Semi-automatic swing arm
- Inserts protect aluminum wheels
- · Lubricating and water separating system
- * Dual cylinders on clamping table clamps
- · Air tank in tower
- Inside clamping diameter 15-26"
- Outside clamping diameter 12-24"
- Max tire outside 47", max rim width 15", bead breaker force 5,500 lbs., power requirements 110V

TC875 \$3,399.99 REG \$3,999.99



WHEEL BALANCER AND WHEEL DOLLY

WHEEL BALANCER WITH MANUAL INPUT

The WB1500 is a computerized digital wheel balancing machine designed for precision balancing of car and light truck wheels.

- * Easy and fast cycle time only 6-8 seconds
- * Split weight program
- · Suitable for PAX wheels
- Optimization program
- * Self diagnosis and self calibration
- *Low balancing speed, no wheel guard needed
- Fully automatic braking included
- Standard power supply 110V, balancing accuracy to 1 gram, rim width 1.5" 20", rim diameter 10" 30", wheel maximum weight 165 lbs.

WB1500 \$3,393.99 REG \$3,991.99

SPECIFICATIONS	7
Weight Capacity (lbs.)	165
Power Requirements	115V
Drive System	Motor
Max. Outside Tire Diameter	42"
Rim Width Range	1-1/2" - 20"
Rim Diameter Range	10" - 30"
Alloy Wheel Modes	Yes
Split and Hidden Weight Program	Yes
Direct Weight Program (Tape-a-weight)	No
Hood Standard Equipment	No
Automatic Distance Input	Manual
Automatic Diameter Input	Manual
Automatic Width Input	Manual
High-Definition LCD Monitor	No
Eccentricity (Radial Run-Out)	No
Patented Pneumatic Locking	No
Balancing Accuracy	1 Gram
Printer	No







WHEEL DOLLY

- Hydraulic system provides smooth, positive power for the removal and installation of single, tandem and duplex tires and wheels
- * Heavy-duty tubular construction with precision crafted rollers
- · Safety chain included to aid in load restraint

WD1500 \$356.99 REG \$419.99

PRODUCT NUMBER	CAPACITY (TON)	LIFTING RANGE	LIFTING ARM DIMENSION	TILT RANGE	PRODUCT SIZE(Lx W x H)	N.W.(LBS.)
WD1500	3/4	2-1/4" to 11"	25-7/8" - 25-1/4"	-2° to +10°	43-1/2" x 43" x 34-7/8"	183





CORDLESS 8-TOE CCD WHEEL ALIGNER

- 2.4 GHz transmission eliminates cables
- Remote controls at each sensor provide the ability to control the alignment program
- 19" LCD standard
- 20' CCD cameras
- Automatic spoiler program
- 42" Tire capability with standard tire grabbers
- * 234" (19.5') Wheelbase range

WL48631CL \$12.919.99 REG \$13.599.99



WHEEL ALIGNMENT COMPACT UNIT

The WL5200CL is a unique wheel alignment system for cars and light trucks that offers four Bluetooth wireless rechargeable alignment heads which include lithium ion batteries for long life. It comes complete with netbook computer and storage cabinet and features eight cameras which allow blocked beams and calibration checks during every alignment using user friendly software to guide the technician.

Features:

- · Accelerometers (newest measuring technology)
- PC based software with multiple languages
- 24" Wheel clamping range (30" optional)
- · Power supply and USB Bluetooth antenna
- . Vehicle and customer database
- Function controls at measuring heads
- * Two wheel alignment capable with two heads only
- . Measures SAI, toe out on turns and set-back
- . Lock and hold adjustments for lifted wheels
- * Freeze mode
- * View all adjustments for one axle on one screen
- * Front and rear spoiler mode allow heads to be tilted into view
- * Zoom screen from each head to increase viewing range
- · All front and rear readings are live
- * Each machine comes with a 1-year parts and labor warranty
- * Manufacturer reserves the right to make any and all alterations it may consider suitable without notice

Optional Accessories:

- · Printer
- 17" Flat screen monitor
- · Steering wheel lock
- · Brake pedal lock
- Turnplates.
- · Backup cable kit
- Jaw extension kit (dually)
- 30" Clamp extension kit
- * Drop down kit

WL5200CL \$11,999.99 REG \$12,999.99

DATATORQ

DATATORQ

For increased safety and productivity, the modern tire shop or vehicle repair center needs to ensure that wheel lugs are tightened both evenly and to the correct torque level. DataTorq is the answer. Precision controlled torque in an easy-to-use, free standing unit. The power of an impact tool optimized for productivity and control. DataTorq delivers accurate and reactionless high-speed performance across a wide range of wheel types and specifications.



12V DATATORQ PORTABLE HEAVY-DUTY SYSTEM (1")

- For use with heavy-duty trucks and off-road vehicles
- Improves operational productivity
- * Documents and controls wheel securing process
- · Reduces damaging wheels
- Torque range: 450 1100 ft./lbs.
- Free speed: 4500 rpm
- Output drive: 1" square
- Tool weight: 26 lbs. (11.8 kg)

ADT006 \$6,594.99











JACKS, TIRE BEAD SEATER



SAVE \$117

10-TON LIGHTNING LIFT™ SERVICE JACK

Innovative design of Lightning Lift™ offers a quicker lift for professional performance. After the first pump reaches the lifting point, the jack continues to raise the load at an extraordinary lifting speed to desired load height. Exclusive breather plug eliminates air in hydraulic system. US patented built-in-bypass device protects hydraulic system from over pumping. Heavy gauge steel construction resists twisting.

- * Minimum height: 6-7/8"
- ◆ Maximum height 27"

JSA1000MA \$849.99 REG \$916.99



22-TON LOW CLEARANCE AXLE JACK

- 8-1/4" Minimum pick up for low access to lift point
- * Three handle angle choices for space saving storage, easy carrying, moving and easy access to lifting point
- 1", 2-1/2" and 5" Adapters included
- · Large steel wheels for easy positioning and smooth motion

JSA22LOPRO \$659.99 REG \$776.99



- Lifts 10-tons at 200 psi
- 2-1/2" pneumatic rear tires and 2-6" casters for easier transport and positioning under load
- Less maintenance with one large cylinder
- Longer reach

HW93690 \$3,764.99 REG \$4,428.99



TIRE BEAD SEATER

The Tire Bead Seater is used to make inflation possible when a tire, new or used, is mounted on a wheel and the tire bead does not touch both sides of the wheel. The air trigger on this tool expels a tremendous burst of air that inflates the tire to seat it to the wheel rim. This allows the tire to be inflated to the recommended pressure through the tire valve. The Tire Bead Seater is equipped with unique configurations that enhance ease-of-use, productivity and safety for the technician looking to get the job done right every time. Unlike other options out there, the Tire Bead Seater's ASME certified 13-gallon tank is designed with a nozzle and valve connected via hose assembly, giving the user more control rather than requiring them to hold the weight of the tank. The trigger style discharge valve allows for optimum airflow control while allowing both hands to firmly hold the nozzle/valve assembly, critical for effective and safe use. Wheels and handle function in either the vertical or horizontal position for easy mobility and storage. Unique nozzle design significantly reduces "blowback recoil" and contains discharge holes strategically placed for optimum inflation of a wide range of the tire sizes and wheel diameters. Air valve included for filling tank, which also provides compressed air for filling the tire while seating the bead - optimum for on-the-road service.

5713 \$759.99 REG \$799.99

ENGINE STANDS, TRANS JACKS, RAMPS



6,000 LB. CAPACITY REVOLVER® DIESEL ENGINE STAND WITH UNIVERSAL ENGINE ADAPTER ASSEMBLY

- Rotating even a 6,000 lb. diesel engine is easy; 96:1 ratio worm and gear set does the job
- · Crank handle can be locked in any position
- . Covered by OTC Lifetime Marathon Warranty®
- Integral 12-ton jack raises the work to provide the swing radius needed for clearance
- Two front wheels and two rear casters provide mobility
- Universal adapter assembly permits use with a wide variety of mounting plates for Caterpillar, Cummins, Mack, IH, and Detroit in-line or "V" series diesel engines, as well as Allison transmissions

1750A \$7,124.99 REG \$7,499.99



1,000 LB. CAPACITY 2-STAGE TRANSMISSION JACK

- 2-Stage chrome-plated rams maximize high reach by a user-friendly foot operated pedal
- Extra-wide base lowers center of gravity and promotes stability
- A unique release pedal provides safety in lowering the load
- Rugged steel wheels and full swivel ball bearing casters
- · Fully adjustable head
- Load-restraining strap is vital for raising and lowering safely
- Ratcheting head configures to most transmission pan configurations
- Minimum height: 6-7/8"
- Maximum height 27"

JT1000 \$999.99 REG \$1,175.99



20-TON 18" WIDE TRUCK RAMPS

18" Wide ramps are specially designed for heavy-duty use. The non-skid rubber matting prevents the ramps from moving during loading. The T-Handle makes it easy to position the ramps to the desired location.

TR20W \$673.99 REG \$792.99

18-PC. 8-PT. WHEEL BEARING LOCKNUT SOCKET SET WITH TOOL BOARD

Includes:

2-3/8", 2-9/16", 3", 3-1/4", 3-1/2" 3-7/8", 4-3/8", 4-7/8", 3-3/8" 3-3/4", 3-13/16", 2-5/8", 2-7/8" 3-5/8", 2-7/8", 3-1/8", 2-3/4"

9851 \$759.99 REG \$799.99







SAVE \$19

MW 170N

130 AMP MIG WELDER - 5/32" PRODUCTION

This commercial 120 Amp 4-step output system with 115V input power is capable of welding #24 gauge to 5/32" with steel wire and up to 5/16" with flux-cored wire from .023" to .030" diameter. Package includes machine, NM14 Ergonomic MIG gun with 8.5' cable assembly, oversized earth clamp and cable, brass gas regulator and hose, mild-steel welding wire and complete operator instruction manual.

- Input power: 115VAC @ 20 Amps
- * Output power: 18VDC @ 120 Amps
- Power settings: Four-Position Toggle
- Duty-cycle: 80 Amps @ 20%
- * Dimensions: 10.25" x 12.00" x 17.50"
- Weight: 52 lbs. (24 kg)

MG130 \$648.99 REG \$720.99



140 AMP MIG WELDER - 3/16" PRODUCTION

This professional 145 Amp 6-step output system with 115V input power is capable of welding #24 gauge to 3/16" with steel wire and up to 5/16" with flux-cored wire from .023" to .030" diameter. Spool gun ready for aluminum from 22 gauge to 1/8". Package includes machine, SL15 Ergonomic MIG gun with 10' cable assembly, direct-connect earth clamp and cable, brass gas regulator and hose, mild-steel welding wire and complete operator instruction manual.

- Input power: 115VCA @ 20 Amps
- Output power: 20VDC @ 140 Amps
- Power settings; Six-position rotary
- Duty-Cycle: 90 Amps @ 30%
- Dimensions: 10.80" x 14.00" x 18.50"
- Weight: 64 lbs. (29 kg)

MW140N \$999.99 REG \$1.194.99

180 AMP MIG WELDER - 1/4" PRODUCTION

This professional 180 Amps 6-step output system with 230V input power is capable of welding #24 gauge to 1/4" with steel wire and up to 3/8" with flux-cored wire from .023" to .030" diameter. Spool gun ready for aluminum from #22 gauge to 3/16". Package includes machine, SL15 Ergonomic MIG gun with 10' cable assembly, direct-connect earth clamp and cable, brass gas regulator and hose, mild-steel welding wire and complete operator instruction manual.

- Input power: 230VAC @ 20 Amps
- . Output power: 22VDC @ 180 Amps
- Power settings: Six-position rotary
- Duty-cycle: 130 Amps @ 30%
- * Dimensions: 10.80" x 14.00" x 18.50"
- * Weight: 64 lbs. (29 kgs)

MW170N \$1.519.99 REG \$1.595.99



260 AMP MIG WELDER – 1/2" PRODUCTION

This professional 260 Amp shop mig welding system provides maximum 14-step output power with dual chokes on a standard 230V circuit and is capable of welding #24 gauge to 1/2" with steel wire from .030" to .045" diameter. Spool gun ready for aluminum from #22 gauge to 7/16". System rated 250 Amps @ 30% DC with .023-.045" wire drive. Package includes machine, SL25 Ergonomic MIG gun with 10' cable assembly. Dinse-connect earth clamp and cable, brass gas regulator and hose, mild-steel welding wire and complete operator instruction manual.

- Input power: 230VAC @ 38 Amps
- Output power: 22VDC @ 260 Amps
- Power settings: Fourteen-position rotary
- . Duty-cycle: 160 Amps @ 60%
- Dimensions: 17.50" x 31.50" x 31.00"
- Weight: 221 lbs. (100 kgs)

MW260N \$2,697.99 REG \$3,172.99

SPOOL GUN DIRECT-CONNECT 20' CABLE, 3/8" MAXIMUM - 185 AMPS

Rugged and compact this heavy-duty spool gun is ideal for all automotive, truck and trailer, farm equipment, food service and industrial aluminum welding jobs. High-impact case with 24V permanent magnet DC motor provides smooth wire feed in the toughest of environments. Twist-lock power and control connects. Compact spool gun with dual-feed drive rolls smoothly dispenses the thinnest gauge aluminum wire from standard 4" spool. Direct-connect feature allows for switch on-the-fly operation when used with MG260 welder and 20' integral power/gas/control cable assembly allows for maximum flexibility. Package includes 185 Amp spool gun with .035" contact tip and 20' direct-connect cable assembly with twist-lock plugs. Additional shield gas regulator purchased separately

MWSPLGUN \$949.99 REG \$1,001.99



WELDERS & PLASMA CUTTERS

155 AMP DC TIG WELDER - 3/16" PRODUCTION

This portable professional 155 Amp electronic inverter tig welding system features infinitely adjustable output (5–155A) and lift-arc ignition on 230V single-phase input power and is capable of welding all types of steel alloys from #24 gauge to 3/16". System rated 140 Amps @ 30% DC, making it the perfect machine for automotive and light industrial applications. Package includes compact inverter power supply, SR 17V TIG torch with 12.5' dinse cable assembly, 200 Amp electrode holder with dinse cable, brass-jaw earth clamp with dinse cable, brass gas regulator and hose, AK-2 tig torch accessory kit and complete operator instruction manual.

- Input power: 230VAC @ 20 Amps
- . Output power: 155 Amps DC
- Power settings: Lift-Arc start
- . Duty-cycle: 140 Amps @ 30%
- * Dimensions: 5.50" x 10.20" x 14.50"
- · Weight: 17 lbs. (7.7 kgs)

TIG155N \$1,567.99 REG \$1,843.99





160 AMP AC/DC TIG WELDER - 3/16" PRODUCTION

This portable professional 160 Amp electronic inverter tig welding system features infinitely adjustable pulsed output (5-160A), program memory storage, lift-arc or HF ignition, slope power and shield gas delay on 230V single-phase input power and is capable of welding all steel alloys as well as most aluminum alloys from #24 gauge to 3/16". System rated 160 Amps at 40% AC/DC making it the perfect machine for automotive and light industrial applications. Package includes compact inverter power supply, SR17 tig torch with 12.5' dinse cable assembly, brass-jaw earth clamp with dinse cable, foot pedal control with 10' direct-connect cable, brass gas regulator and hose, AK-2 TIG torch accessory kit and complete operator instruction manual.

- Input power: 230VAC @ 20 Amps
- * Output power: 160 Amps AC/DC
- · Power settings: Lift-Arc or high-frequency
- Duty-cycle: 160 Amps @ 40%
- * Dimensions: 8.66" x 15.35" x 18.10"
- Weight: 40 lbs. (18 kg)

TIG1710 \$3,579.99 REG \$4,211.99



PLASMA CUTTING SYSTEMS

- * High efficiency electronic inverter power supply
- Clean-cut infinitely adjustable output power
- Professional grade duty-cycle performance
- Microprocessor control with LED indicators
- Continuous pilot arc ignition for all surfaces
- * Adjustable air regulator/filter with gauge
- · Ergonomic torch with trigger guard
- · Heavy-duty earth clamp

Packages include:

- * 3-Wire UL power cord
- NPT40 plasma torch
- HD work clamp with 13' UVIR welding cable
- · Spare cutting tips and electrodes
- Operator manual

3/16" GENUINE - 5/16" SEVERANCE

This inverter plasma system provides up to 18 Amps of cutting power to genuine cut 3/16" mild steel. 5-18 Amp inverter power source with adjustable air regulator filter dryer.

- Input voltage: 115VAC @ 60Hz
- . Output current: 18 Amps
- Input current: 20 Amps
- Supply Air: 70 psi (4.8 bar) @ 3.5 scfm (95 l/m)
- * Dimensions: 8.00"W x 10.0"H x 16.25"D
- · Weight: 20 lbs.

PCA28 \$1,186.99 REG \$1,395,99



1/4" GENUINE – 1/2" SEVERANCE

This inverter plasma system provides up to 28 Amps of cutting power to Genuine cut 1/4" mild steel, 5-28 Amp inverter power source with adjustable air regulator filter dryer.

- Input voltage: 230VAC @ 60Hz
- Output current: 28 Amps
- Input current: 20 Amps
- Supply Air: 70 psi (4.8 bar) @ 3.5 scfm (95 l/m)
- * Dimensions: 8.00"W x 10.0"H x 16.25"D
- · Weight: 24 lbs.

PCA38 \$1,308.99 REG \$1,539.99

1/2" GENUINE - 7/8" SEVERANCE

This inverter plasma system provides up to 48 Amps of cutting power to genuine cut 1/2" mild steel. 5-48 Amp inverter power source with adjustable air regulator filter dryer.

- Input voltage: 230 VAC @ 60Hz
- . Output current: 48 Amps
- Input current: 30 Amps
- Supply Air: 70 psi (4.8 bar) @ 3.5 scfm (95 l/m)
- * Dimensions: 8.00"W x 10.0"H x 16.25"D Weight: 27 lbs.

PCA58 \$2,399.99





TOOL BOXES & PRESSES



6-DRAWER DROP FRONT SERVICE CHEST

- · Heavy-duty drop front panel locks
- Full-length drawer pulls
- · Recessed drawers
- · Built-in drawer dividers
- · Pre-cut drawer liners provided
- · Available in red, black and blue


MB9000 \$1,929,00











- 5-Drawers with 400 lb. capacity ball bearing drawer slides allow for plenty of storage
- Lock-in/lock-out drawer feature keeps drawers open or closed in uneven surfaces
- Drop front with weather seal keeps tools cleaner and dryer
- . Four tie-down handles allow you to move the box or secure it to the truck
- · Forklift skids make it easy to load and unload
- . Available in your choice of 10 colors

MB9009 \$2,229.00

COLORS STANDARD WITH SILVER TRIM



COLORS STANDARD WITH BLACK TRIM





25-TON SHOP PRESS PACKAGE

SAVE \$171

- . Heavy steel welded construction for additional stability
- · Complete kit including arbor plates, bearing punch and pressure gauge
- · Hand pump provides effortless operation
- Ideal for the removal or installation of gears, pulleys and universal joints
- Bed has 8 positions allowing for varying work heights

SHP25X \$967.99 REG \$1,138.99



- Water blocking filter with clear sight glass
- * A preventative maintenance tool
- . Special wands included for accessing the bottom of the fuel tank
- Includes hoses and quick disconnect fittings
- · Steel welded frame

Specifications:

Pump type: rotary vane Pump req.: 120V AC (6.5A) Flow rate: 18 GPM Input: 1" diameter Output: 3/4" diameter

Filter: 10 micron water blocking Frame: steel construction

Weight: 32 lbs.

Body dimensions: L: 19 1/2" x W: 19 3/4" x H: 36 1/2"

Agriculture, construction, automotive, fleet, MRO, residential and commercial fuel oil

- 6' L x 1" Clear intake hose
- 6' L x 3/4" Black output hose
- 10 Micron filter
- ◆5'Lx 1/2" Flexible output wand
- *5'Lx 3/4" Flexible input wand

DTP12C \$1,274.99 REG \$1,499.99







FLEET TANK SWEEPER®

Battery-powered mobile platform with built-in meters and filtration for general fuel transfer

Features and benefits:

- . Quickly transfers, filters, and blends fuel
- 100% Mobile for shop, field and over the road use
- Pump includes 2-year warranty
- Improves safety and increases efficiency
- · Removes impurities from fuel including rust, dirt/debris and water

Specifications:

Pump type: rotary vane Pump req.: 120V DC (30A) Flow rate: 20 GPM Input: 1" diameter Output: 3/4" diameter

Filter: 10 micron water blocking Frame: steel construction

Meters: panel mounted volt and amp meters

Weight: 85 lbs.

Body dimensions: L: 14" x W: 23" x H: 42"

Industries:

Agriculture, construction, automotive, fleet, MRO, residential and commercial fuel oil

Includes:

- 11' Intake hose
- 12' Output hose

DTP20C \$1,999.99 REG \$2,199.99





FUEL TANK SWEEPER®

Pneumatic transfer pump mounted on steel cart with wheels

Features and benefits:

- · High-speed liquid transfer
- Used for diesel, kerosene, engine oil, hydraulic oil, water and more
- A safe and fast solution
- High quality pump with replaceable seals
- · Clear hoses included
- · Steel welded frame

Specifications:

Pump type: diaphragm

Pump req.: minimum: 4 CFM @ 50 PSI

Maximum: 20 CFM @ 100 PSI

Flow rate: 0-50 GPM Input: 1" diameter

Output: 100 PSI, maximum

Filter: not included

Frame: steel construction

Weight: 65 lbs.

Body dimensions: L: 22-1/4" x W: 23-1/4" x H: 43-3/4"

Applications:

- * Trucks
- Tractors
- 55-Gallon drums
- · Storage tanks

Includes:

- * Cart
- * Pump
- · Wheels
- 12' Clear intake hose
- 12' Clear output hose

DTP30C \$3,199.99 REG \$3,299.99







BT6042 BATTERY / STARTER / ALTERNATOR ANALYZER

- 0-500 Amp carbon pile load tester
- Test up to 1,000 CCA-rated batteries
- · Start draw test with included 1000 Amp inductive amp clamp
- * Alternator output test
- . Diode test
- 0-32V digital volt meters test 6/12, 24V systems
- · Polarity protected against reverse hookup
- · Includes cart
- 1-Year warranty

BT6042 \$1,569.99 REG \$1,768.99





BCH9001 INTELLAMATIC SMART CHARGER

BIASSOCIATED

- 12V, 40/45 Amp output
- 130 Amp boost assist
- · Polarity protected against reverse hookup
- Safe for all battery types including flooded acid, AGM or gel-cells
- . Deep discharge recovery of sulfated batteries
- · Battery diagnostics detects weak or defective batteries
- 45 Amp power supply for extended service procedures
- · Will never overcharge batteries
- * UL-rated safe for indoor / outdoor use
- 3-Year limited warranty

BCH9001 \$766.99 REG \$901.99







- . Compact, lightweight, battery powered, remote controlled trailer tester
- Tests both lights and air brakes
- Includes internal batteries with charger, jumper wires
- Full diagnostics for short circuit, open, and crossed circuit identification
- · Mobile unit for off-site repairs

ET7900MSM \$1,699.99 REG \$1,799.99





WITH POWER SUPPLY MODE * 12V, 60/70 Amp output

SMART CHARGER

INTELLAMATIC

- 270 Amp boost assist
- · Polarity protected against reverse hookup
- · Safe for all battery types including flooded acid, AGM or gel-cells
- · Polarity protected against reverse hookup
- Deep discharge recovery of sulfated batteries.
- · Battery diagnostics detects weak or defective batteries
- 70 Amp power supply for extended service procedures
- · Will never overcharge batteries
- * UL-rated safe for indoor / outdoor use
- 3-Year limited warranty

BCH6008 \$969.99 REG \$1,081.99

AUTOMATED BATTERY / ELECTRICAL SYSTEM TESTER

- Easy-to-read LED voltmeter and ammeter
- 500 Amp safety clamps with "Flexi-Spring" and patented side terminal adapters
- Separate light gauge high impedance test leads with alligator clips for tight spots
- Detachable industrial inductive Amp probe with degauss button
- · Automated testing of battery, alternator, starter, max./min. of current and voltage
- Microprocessor-based control board protected from reverse connections while heavy-duty conformal coating to protect from moisture and dirt
- Testing of 24V electrical systems
- · Automated 500 Amp fixed load
- . Includes roll-around cart

5165-6044 \$2,616.99









Mac Tools LEAK ATTACK DIAGNOSTIC SMOKE MACHINE

LEAK DETECTION





- Full featured diagnostic capabilities
- * Easy to use
- · EVAP approved
- * Economical by working with shop air and uses mineral oil
- . The most compact smoke machine available

EV9510B \$1,239.99 REG \$1,299.99

SUPER MUTT® DELUXE MASTER TRAILER TESTER

Air brake testing

- · Performs leak down test on service and emergency lines
- . Observes slacker adjustment in real time
- * Activates air brakes by remote control

Electrical testing

- Pulsar® mode, cross, open, overloaded and short circuit indication
- · Amperage readout, audible and visible alerts
- 7-Way cable testing
- · Access ABS blink codes
- · Activates lights by remote control

Remote control

- · One-man testing
- Real-time servo on/off engagement
- * Program multiple remotes; 100' range

Specifications:

- Connection type: 7-round pin
- * Power: 12/24V DC
- Power input: group 31 (or similar battery) or external 12V power source
- Output: 20A @ 12/24V DC
- Max. operating pressure: 120 PSI
- . Controls: manual, remote, automatic
- . Materials: powder coated steel construction
- · Weight: 40 lbs.
- * Body dimensions: L: 21" x W: 34" x H: 14"

Includes:

• 3 Remote controls, 5' 7-way cable, chassis ground cable, external battery connector, 6' glad hands, 3 Amp battery charger, face shield and rain cover













SMOKE PRO AIR COMPLETE

Self-contained diagnostic leak detector with built-in microcompressor and internal air supply. This ultra-portable smoke machine can be used to quickly diagnose, detect, and pinpoint a variety of leaks. No need for shop air or inert gas supply. Simply hook up 12V battery to begin 5-minute smoke cycle. OEM-approved smoke agent produces the thickest smoke available to test evap, intake, exhaust, and many other systems.

Includes complete accessory kit:

- · OEM-approved smoke producing fluid
- · Inspection light
- * Cap plug kit
- · Hook
- · EVAP service port adapter
- · Schrader valve removal tool
- · Exhaust cone adapter
- * X-large exhaust cone
- · Storage case

EV9520 \$1,899.99 REG \$1,999.99





HEAVY-DUTY SCAN TOOL

Kit includes: Heavy-duty scan tool, 9-pin Deutsch cable, 6-pin deutsch cable, OBD II cable, heavy-duty cable, USB cable, Scanmate software, operations manual, carrying case and 3-year warranty.

CATEGORY

Heavy HDScan

Heavy-Duty Software

Light HD Scan Global OBD II

Medium HD Scan Helavy-Duty Software

He awy-Duty Scan Targets Class 4-8 Trucks

manufacturer truck classifications.

ET3417 \$1,529.99 REG \$1,799.99



REPRESENTATIVE VEHICLES

Pickup trucks, ambulances,

Parcel delivery

City cargo van beverage

delivery truck, wrecker,

school bus

Truck tractor, concrete mixer,

dump truck, fire truck, city

transit bus







MAC MENTOR™ PRO HEAVY-DUTY STARTER KIT

Mac Mentor™ Pro Heavy-Duty supports two Society of Automotive Engineers (SAE) standards for the heavy-duty industry - J1587 / J1708 and J1930 CAN.

Features:


- ◆ Class 4 Class 8 truck coverage
- View and clear diagnostic trouble codes
- . Live vehicle data

Applications:

- Tow trucks, recreational vehicles, buses, cement trucks, dump trucks, step vans, garbage trucks, municipal vehicles, refrigerated trucks, and conventional trucks
- Mac Mentor™ Heavy-Duty Standard software includes. J1587/1708 and J1939 CAN communications
- Kit includes 9-pin Deutsch cable, 6-pin Deutsch cable, heavy-duty System, Smart Card, and PC software CD

Note: System 3.0 or newer 1 GB card required to install; see ET3421-130

ET3421-79 \$799.99




EUROPEAN VERSION DIAGUN

The EuroPro is our solution to the ever-increasing demand for European Applications for Diagnostics. It offers coverage unparalleled in the industry, with full OE applications for Audi, VW, BMW/MINI, Fiat, Jaguar, Mercedes, SAAB, Land Rover, Volvo, SMART, Porsche, and Sprinter/Transporter. Don't be fooled by other manufacturers' claims that they have the best Euro Solution, yet are MISSING coverage for Land Rover, Jaguar, Volvo, Porsche, SAAB, SMART and Sprinter/Transporter!

- OE coverage for all 12 Euro manufacturers
- * Single 16-pin connector technology
- Keyless technology no time wasted searching for missing keys
- * High resolution LCD color touch screen
- Unsurpassed R&D with over 500 global software updates alone in 2010
- . Access ECM, PCM, BCM, ABS, SRS, A/T and more
- . View, graph, record and print live data
- * 1-Year of free software updates
- * Proprietary underhood connectors for BMW and Mercedes-Benz included
- *Read and clear codes, perform ABS brake bleeding

ETX433-EP \$1,359.99 REG \$1,599.99



LAUNCH

Vehicle manufacturers use precise technical definitions and divide trucks into eight classes according to gross vehicle weight rating (GVWR). The table shows vehicle

> GVWR2 0 - 27 kN (0 - 6,000 lbs.)

27 - 45 kN (6,001 - 10,000 lbs.)

45 - 62 kN (10,001 - 14,000 lbs.)

62 - 71 kN (14,001 - 16,000 lbs.)

71 -87 kN (16.001 - 19.500 lbs.)

87 - 116 kN (19.501 - 26.000 lbs.)

116 -147 kN (26,001 - 33,000 lbs.)

147 kN and over (33,00 lbs. and over)

CLASS

1

2

3

4

5

6

7

8

DIAGUN WITH ASIAN, DOMESTIC, EURO

Designed for the automotive technician who is looking for unrivaled mobility and full Launch software capabilities. Featuring a compact PDA size main unit, powerful diagnostic functions, lightning-fast boot-up and Bluetooth wireless connectivity for as far as 300', the ETX433-WK truly has no competition.

- Powerful OE level software such as module configuration and coding
- · Key relearning
- Im mobilizer
- Throttle body adaptation
- Steering angle resets
- Wireless as far as 300'
- Ultra-fast boot-up and navigation
- * Single connector technology for OBDII and CAN
- . OBDI cables and connectors also included
- Over 800 updates a year
- Now with one click software update wizard

ETX433-WK \$2,719.99 REG \$3,199.99

ETX433SW-DAE \$649.99 REG \$999.99 (not shown)









AUTOBOOK SCAN TOOL

Features all the vehicle coverage of the X431 Professional Line without the bi-directional and coding/programming capabilities.

- Now with single connector technology and faster processor
- Subsystem coverage for all car lines including ABS, SRS, body controls, climate controls and more
- · Asian, European and Domestic software all included
- · All connectors included
- 1-Year of free updates
- . Now with one click software update wizard

ETX432 \$1,274.99 REG \$1,499.99



GLOBAL SCAN TOOL KIT

With the all-new GDS, you have OE-level access to domestic, European and Asian manufacturers, for read/clear codes, live data graphing and recording, bidirectional testing and module coding. The GDS offers unrivaled speed in the access and communication of all vehicle systems and their modules. Boot-up and navigation, as well as diagnostic procedures are performed ultra-fast and with superior coverage. The GDS is also Wi-fi-enabled, allowing you access to your favorite websites for troubleshooting advice, diagrams, and repair information. Adding to the list of new features is a one-button update which allows you to update one or more car lines with the simple push of a button.

- OE-level scan tool access for domestic, Asian and European applications
- * Full module coding and bi-directional capabilities
- True PC architecture and processor boot-up and navigate through menus in lightning speed. Surf the web and access repair databases. The GDS runs on Windows XP professional embedded and is not limited by Win CE, which is found in most competitor's scan tools – this enables the GDS to multi-task and have multiple applications running at the same time
- 1.0Ghz processor and a solid state hard drive to ensure durability in today's demanding shop environment
- * Large high-resolution WVGA touch screen
- One click, one button update. Why stop what you're working on to update software when you don't have to? Update on the fly with our one click update feature.
- Wi-fi wireless built-in (B, G, and N compliant) and an ethernet port should you need it. The GDS' built-in wireless card gives you fast and convenient access to your favorite websites and repair databases
- Plug and play video out allowing for dual screen outputs of 1024 x 768 and 800 x 600
- Optional modules available: lab scope, battery box, sensor simulator and J2534 pass-thru

ETX431GDS \$2,999.99

ETX431T00L-SW \$649.99 REG \$999.99 (not shown)

ETX431STD-SW \$649.99 REG \$999.99 (not shown)





OEM-level European and Asian vehicle coverage, strong domestic coverage, access virtually all modules, read and clear codes, full data stream and graphing ability, bi-directional testing, module coding, adaptations and much more

- · Single connector technology built-in less hassle, easier to use
- Faster processor boot-up and navigation is 30% faster than previous model
- OEM-level European, Asian and domestic coverage
- Integrated printer print codes and PID data
- Full bi-directional testing and module coding capabilities
- . Bluetooth wireless for up to 100'
- 12 Months of free software updates
- All inclusive package no additional cables, accessories or software needed
- · Now with one click software update wizard

ETX431 CUBE2 \$2,399.99 REG \$2,599.99





GLOBAL SCAN TOOL KIT

Looking for an inexpensive way to get into Launch's New Generation software suite? Then look no further. The X431 Master includes functions such as: read/clear DTC's, read/graph data stream, actuation tests, display sensor waveforms and module coding. With Single Connector Technology built in, diagnosing vehicles is now more efficient.

- . OEM-Level European, Asian and domestic coverage
- Full bi-directional testing and module coding capabilities
- Adaptive resets and relearns
- Full OBDII test mode coverage
- 800+ Web updates a year
- Now with one click software update wizard
- Live graphing
- * Built-in printer

ETX431MST \$1,999.99 REG \$2,299.99







FLEET DIAGNOSTICS





JPRO® Commercial Fleet Diagnostics software is the solution for mixed fleets. Whether working on large class 7 or 8 vehicles with dual diagnostic ports for both the J-BUS or OBD-II networks, or a 1/2-ton Ford or GM pick-up/SUV, JPRO® Commercial Fleet Diagnostics is the only PC-based diagnostic tool that covers this broad spectrum of vehicles.

Features:

Displays all vehicle faults, gives the user the ability to clear faults, provides key data points, and allows quick and easy toggling between all of the critical elements of each system. Other features include the ability to record data into log files for playback, view and chart engine parameters, view emissions test results, print reports, launch OEM software (if installed), and provides links to the OEM service literature websites (internet connection required). GM module requires the JPRO® DLA+ (#N012206) or DLA+ Wireless (#N012208) adapter.

Coverage

- 2002-2011 1/2-ton through 8500 series
- · Gas and diesel engines
- · Total vehicle coverage
- · Emission and diagnostic testing
- · Cylinder cut out test
- . Clears faults

Vehicle readiness

- . Displays vehicle health status
- Roll call displays all vehicle components

Kev data points

- · Contains graphical displays of key component data values
- Dashboard lamp shows the current vehicle's lamp status.

Fault code information

- Displays all relevant fault information
- · Clears faults
- · Reports individual fault freeze frame information

Data monitor

- · View sensor data in real time
- · Strip charting of selected data items

N011231 \$749.00

Ask your Mac Tools® Distributor or Franchisee about Ford Fleet Diagnostics.



JPRO® FULLY RUGGED FLEET SERVICE KIT

This kit comes with the touchscreen-capable Panasonic Toughbook CF-31 and is built to stand up to rain, extreme temperatures, sunlight and the dirtiest service bay environments and comes with a 3-year manufacturer's warranty. Includes adapter and fleet service kit carrying case.

Kit comes complete with:

- JPRO® Heavy-duty Fleet Diagnostics software with 1-year of updates and support
- Choice of JPRO® vehicle adapter
- . 6 and 9-Pin "dual CAN" Y-cable
- 15' USB cable

N065125 \$8,799.99



HEAVY-DUTY TRACTOR/TRAILER ABS DIAGNOSTIC KIT

This kit comes with a diagnostic desktop platform, adapter, and carrying case to diagnose, test and initiate the repair of heavy-duty tractor and trailer anti-lock braking systems. Includes a 1-year manufacturer's warranty. Platform model may vary.

Kit comes complete with:

- Heavy-duty ABS Software Bundle (Bendix ACOM, Haldex ABS, Meritor WABCO Toolbox, Wabash ABS)
- 6 and 9-Pin "dual CAN" Y-cable (3')
- . PLC J560 cable with "T" connector
- * USB cable (15')

N070050 \$1,799.99



JPRO® SEMI-RUGGED FLEET SERVICE KIT

This kit includes a semi-rugged Panasonic Toughbook CF-53 and comes with a 3-year manufacturer's warranty. Includes adapter and fleet service kit carrying case.

Kit comes complete with:

- JPRO® Heavy-duty Fleet Diagnostics software with 1-year of updates and support
- . Choice of JPRO® vehicle adapter
- . 6 and 9-Pin "dual CAN" Y-cable
- * 15' USB cable

N0563050 \$5,999,99

JPRO® SEMI-RUGGED HD FLEET SERVICE KIT

 Kit includes semi-rugged Panasonic Toughbook CF-52 and comes with a 3-year warranty

N0563025 \$5,799.99





JPRO® DLA+ PLC TRAILER BRAKE KIT

Our Standard DLA+ Adapter With PLC. Noregon's JPRO® DLA+ PLC Adapter comes with everything you need to connect a heavy-duty vehicle or trailer to a PC in order to run diagnostics. Allows communication with and diagnostics of ABS and J1939/J1708/J1587 devices.

- Works with all heavy-duty OEM software (OEM diagnostic software sold separately)
- · Heavy-duty only

Includes:

- JPRO® DLA+ PLC Adapter
- 6 and 9-Pin "dual CAN" Y-cable (3')
- PLC J560 Cable with "T" connector
- USB Cable (15')
- . JPRO® carrying case
- Software driver CD
- 3-Year warranty

Note: Software not included NO512204 \$1,249.99

FLEET DIAGNOSTICS

JPRO® FLEET DIAGNOSTICS V5.0 COMPLETE VEHICLE DIAGNOSTICS

JPRO® Fleet Diagnostics is a complete, easy-to-use, commercial vehicle diagnostic application.

Heavy-duty:

JPRO® Fleet Diagnostics works with all heavy-duty vehicle (chassis), engine, transmission, and braking systems for complete vehicle troubleshooting and repair

Fastures.

Displays all vehicle faults, gives the user the ability to clear faults, provides key data points of interest to the technician, and allows the tech to quickly and easily toggle between all of the critical elements of each system. Record data into log files for playback, view and chart engine parameters, print reports and launch OEM software and troubleshooting guides with the click of a button. Ability to run diagnostic tests on medium-duty commercial vehicles.

Vehicle readiness

- Displays vehicle health status
- * Roll call displays all vehicle components
- * Detailed vehicle and component information

Key data points

- · Contains graphical displays of key component data values
- Dashboard lamps show the current vehicle's lamp status

Fault code information

- Displays all relevant fault information
- · Clears faults
- Reports individual fault Freeze Frame information
- Launches associated OEM applications and Troubleshooting Manuals (if available)
- Includes 1-year of support and product upgrades



JPRO® DLA+ ADAPTER KIT

Noregon's JPRO® DLA+ Vehicle Adapter Kit comes with everything you need to connect your medium or heavy-duty vehicle to a PC for diagnostics, reprogramming or parameter adjustment.

 Works with all heavy-duty OEM software and some medium-duty OEM software (OEM diagnostic software sold separately)

Includes:

- JPRO® DLA+ adapter
- 6 and 9-Pin "dual CAN" Y-cable (3')
- . USB Cable (15')
- JPRO® carrying case
- · Software driver CD
- 3-Year warranty

Note: Software not included

N0512206 \$899.99







JPRO® BUSINESS CLASS HD FLEET SERVICE KIT

 Includes Dell-platform machine and includes a 1-year warranty

N0561025 \$4,499.99



YSTEM EVACUATION





The easiest to use ATF exchanger ever made.

- Replaces virtually 100% of the dirty fluid in under 10 minutes
- · Convenient drain pan and fluid "fill" control features for easier filter change during ATF
- · Advanced electronic interface provides technician with complete "one-touch" control

MTT1100 \$3,999.99 REG \$4,325.99

COOLANTCLEAN III

A professional coolant flush service center

- * Complete coolant exchange in less than 15 minutes
- * System allows for both static and dynamic operation
- One multi-function switch for efficient operation
- New on-board waste tank has a 28-quart capacity

MCF5100 \$2,884.99 REG \$3,204.99





					SPECIFICATIONS				
PRODUCT HUMBER	POWER CORD	POWER SUPPLY	TIMER	CIRCUIT Protection(AMP)	HOSE OUTPUT AND RETURN	HOSE VACUUM	FUEL TANK Capacity	GAUGE (PSI)	FLUID PRODUCT HUMBER
MTT1100	10' (3m)	12V DC	120	10	10' (3m)	120	(2) 26	0-160	00319-400-0137
MCF5100	10' (3m)	12V DC	(4)	15	8' (2.43m)	(42)	(1) 26	0-30	00319-400-0138





MOTORVAC® TRANSTECH IV: INLINE & DIPSTICK **AUTOMATIC TRANSMISSION** FLUID EXCHANGE SYSTEM

The TransTech IV combines both Inline and Dipstick capabilities allowing for the two most common methods of ATF exchange from a single machine. With both Inline and Dipstick services together in one cabinet, the TransTech IV occupies reduced floor space with minimal investment while providing service to a wider variety of vehicles. Includes 400-0500 fuel system cleaner.

MTT1200 \$4,999.99





MOTORVAC® BRAKEVAC II

The BrakeVac II brake bleeder machine is a simple, user friendly and efficient way to flush and bleed today's high tech brake systems. This system can complete a full brake system flush using pressure and vacuum simultaneously in 10 minutes with only one operator thereby lowering labor costs and maximizing profits.

MBV8100 \$2,574.99 REG \$2,860.99

MAC TOOLS® LATEX GLOVES

Mac Tools® offers a full line of latex, black nitrile, and super thick latex disposable gloves packaged in distinctive Mac Tools® packaging.

GLOVES & HAND CLEANER





HAND CLEANER 4.5 LBS.

This pumicized grime-grabber hand cleaner is tough on even the most difficult grime, yet mild enough to condition the skin. It does not contain the strong solvents found in many low-priced hand cleaners which deflate the skin and rob it of essential fluids. Five premium skin conditioners. May be used with or without water.

HC4540 \$16.99



SUPER TOUGH SCRUB HAND CLEANER

- · Easy-to-use
- · Cleans deep into pores
- * Economical goes three times further
- * Kills odors leaves a fresh smell
- * Won't irritate or burn
- · Leaves hands soft, chap-free
- Clean-up in seconds; cuts through dirt and grease
- Size: 64 oz.

HC64TS \$19.19



POWER WIPES HAND CLEANER

Superior hand cleaner/towel combination. Each dispensing canister contains 90 perforated, easy-tear towels saturated with a special, heavy-duty hand cleaning solution. Made from textured polypropylene material which aids in deep cleaning soils from your hands while the solution effectively dissolves grease, grime, oil, lubricants, paints, adhesives, inks, tar and more. Soils are lifted from your hands and captured in the towel. Each canister has a convenient, push button, pop-open, reusable dispensing top. Eliminates the need for paper towels or shop rags.

HC9060 \$20.99



PARTS WASHERS





- 30-Gallon stand mounted heavy-duty solvent part washer
- ◆ Tank dimensions: PW1030 24" w x 36" | x 17" d
- Designed for solvent-based cleaning solutions
- *UL and CSA approved 115V heavy-duty pump
- *Three removable work shelves for soaking parts
- Comes with small parts basket
- Assembles in minutes
- · Electrostatic paint for durable finish
- Spring loaded lid closure with "fire link"
- Pump pre-filter standard on all models (PW7047)
- CSA/NRTL Approved
- Uses PW3 (5-gal), PW30 (30-gal) or PW55 (55-gal) solvent cleaning solution

Options Include:

- Particle filter system PW5004 (replacement cartridge PW7062)
- * Light kit PW5007
- Self service solvent filter system PW5351 (replacement filter bags PW5345)
- Allows user to filter and remove oil from solvent for continued use of solvent

PW1030 \$941.99 REG \$1,107.99



45-GALLON SOLVENT PARTS WASHER

- 45-Gallon stand mounted heavy-duty solvent part washer
- Tank dimensions: PW1045 24" w x 44" l x 17" d
- Designed for solvent-based cleaning solutions
- UL and CSA approved 115V heavy-duty pump
- Three removable work shelves for soaking parts
- · Comes with small parts basket
- · Assembles in minutes
- Electrostatic paint for durable finish
- PW1045 pistol grip spray nozzle and a flexible metal spigot
- Spring loaded lid closure with "fire link"
- Pump pre-filter standard on all models (PW7047)
- CSA/NRTL Approved
- Uses PW3 (5-gal), PW30 (30-gal) or PW55 (55-gal) solvent cleaning solution

Options Include:

- Particle filter system PW5004 (replacement cartridge PW7062)
- . Light kit PW5007
- Self service solvent filter system PW5351 (replacement filter bags PW5345)
- Allows user to filter and remove oil from solvent for continued use of solvent

PW1045 \$1,369.99 REG \$1,611.99



85-GALLON FRONT LOAD SPRAY WASHER WITH ALL STAINLESS STEEL CABINET


Standard features include:


- 30" Turntable
- * 40" Inside working height
- . Capacity: 500 lbs.
- High volume 3.0hp pump with stainless impeller, 75 gpm @ 45 psi
- 9.0 KW Heating capacity
- . 85-Gallon fluid capacity
- 12" Stainless steel disc oil skimmer with 45-minute timer
- 0-60 Minute adjustable wash cycle timer
- 0-12 Hour adjustable heater timer
- * Stainless steel gasket-free door
- . Liquid level sensor to protect heaters
- Friction drive turntable will not break if part becomes lodged
- Stainless steel nozzles
- *Fold down center spray bar for better cleaning of smaller parts
- * Portable on 4 casters
- 220V 1-Phase 60 Amp
- ◆ CSA/NRTL Approved
- Uses PW745 all-metal safe cleaner

Options include:

- ◆ 220V 3-Phase
- 7-Day programmable timer for heater and/or skimmer PW5468
- Auto water fill PW5465

PWA9600SS \$14,123.99 REG \$16,615.99











FRONT LOAD SPRAY WASHER

Standard features include:


- 30" Turntable
- 40" Inside working height
- . Capacity: 500 lbs.
- High volume 3.0hp pump with stainless impeller, 75 gpm @ 45 psi

SAVE \$1.30

- 9.0 KW heating capacity
- 85-Gallon fluid capacity
- 12" Stainless steel disc oil skimmer with 45-minute timer
- ◆ 0-60 Minute adjustable wash cycle timer
- ◆ 1-12 Hour adjustable heater time
- * Stainless steel gasket free door
- *Liquid level sensor to protect heaters
- *Friction drive turntable will not break if part becomes lodged
- Stainless steel nozzles
- Fold down center spray bar for better cleaning of smaller parts
- Portable on 4-casters
- * 220V 1-Phase 60 Amp
- · CSA/NRTL Approved
- * Uses PW745 all-metal safe cleaner

Options include:

- * 220V 3-Phase
- 7-Day programmable timer for heater and/or skimmer PW5468







AQUEOUS BRAKE WASHER WITH HEATER

Standard features include:

- Basin dimensions: 20" w x 24" l x 7" d
- Designed for non-flammable water-based cleaning solutions
- · Heavy-duty high density polyethylene basin
- · Corrosion resistant heavy-duty air pump
- 15-Gallon plastic drum with dolly on 4 casters
- Flow-thru brush and flexible metal spigot with on/off valve
- * Large lid doubles as catch basin for use on alignment racks or lifts
- Dual filtration pre-filter PW7358 and asbestos sock filter PW7356
- Operating fluid capacity 8-10 gallons
- · CSA/NRTL Approved
- Uses PW600C or PW715 cleaning solutions

KT1435-1 \$1,777.99 REG \$2,090.99







PORTABLE DIESEL PARTICULATE FILTER CLEANER

The Diesel Particulate Filter (DPF) Cleaner was designed with shop service in mind. Its portability allows the unit to be placed as close to the vehicle as possible and to be stored wherever needed in the service facility. The advent of the 2010 Tier 4 cleaning requirements created the need for a lighter, more portable cleaning system which can be taken into the field to clean filters at the point of service.

Complete Kit Includes:

- · Cleaning unit
- Three neoprene rings fit filters from 6" (165 mm) to 15.5" (400 mm) in diameter
- Wet/drv HEPA vacuum
- * Short, long and curved-flange filter nozzles
- * Adjustment feet for standard and flanged filters
- Fully automated operation once started, the cleaning process can be completed with minimal operator oversight, freeing up the technician to simultaneously do other work in the shop
- Focused Air Jet Technology[™] concentrates a precise high pressure stream of air
 directly into every cell which has a unique floating puck that prevents splash back and
 includes three nozzles: two straight (short and long), for standard "open face" DPFs;
 and one curved for the angled-flange DPFs
- Easy maintenance contains no internal filters that require user maintenance
- AC and DC adapter cables
- Innovative ash disposal system enables technician to quickly and easily remove and dispose of particulate matter in accordance with local environmental requirements

5286 \$13,499.99



POWER WASHERS





ELECTRIC POWERED DIESEL FIRED HOT WATER PRESSURE WASHER

◆1,500 psi,3 GPM

PRW1500SHDE \$3,420.99

ELECTRIC POWERED OIL FIRED HOT WATER PRESSURE WASHER

- •1,000 psi, 3 GPM
- Triplex plunger pump with ceramic plungers, stainless steel valves and thermal relief
- * 40' Power cord with ground fault interrupter
- * Adjustable pressure
- * Adjustable thermostat and pressure pop-off
- Chemical injection
- 40' Pressure hose with trigger gun
- Dual wand with side handle and detergent tip
- Quick change tips in 0, 15, 25 and 40
- Totally enclosed motor
- Powder coated frame with wand/hose rack, and 13" pneumatic tires with tubes
- Schedule 80 coil with stainless cold wrap
- 5-Gallon, rust-free burner fuel tank
- Oil-fired burner uses diesel fuel or kerosene to achieve a 140° F rise in water temperature

PRW1000SHDE \$3,250.99



ELECTRIC POWERED DIESEL FIRED HOT WATER PRESSURE WASHER

• 3,000 psi, 3 GPM

PRW3000SHDE \$6,131.99 REG \$7,213.99

SPECIFICATIONS										
PRODUCT NUMBER	PSI/BAR	GPM/IPM	HP	VOLTAGE/ENGINE	BURNER FUEL CAPACITY	DIMENSIONS LXWXH	SHIP WEIGHT (LBS.)			
PRW1000SHDE*	1,000 / 69	3 / 11.4	2	120 / 20	5 gal. Diesel/Kerosene	34" x 27" x 47"	350			
PRW1500SHDE*	1,500 / 103.5	3 / 11.4	3	230 / 20	5 gal. Diesel/Kerosene	34" x 27" x 47"	350			
PRW3000SHDE*	3,000 / 207	4 / 15.2	7.5	230 / 34	5 gal, Diesel/Kerosene	34" x 27" x 47"	600			

*Machine is CETL approved to UL specifications





- 7.5 HP full frame, totally enclosed fan cooled industrial motor
- Triplex plunger pump with stainless steel valves
- Adjustable pressure and chemical injection standard with 3-gallon chemical tank
- · Indoor work horse

PRW3000XAR \$2,875.99



2,500 PSI, 3 GPM, GAS POWERED COLD WATER PRESSURE WASHER


- Triplex plunger pump with ceramic plungers and stainless steel valves
- · Adjustable pressure
- ◆ Thermal relief valve
- · Chemical injection
- ◆ 50" Non-marking hose
- Trigger gun with 36" wand
- Multi-reg 0-60° pattern tip with hi-low for chemical injection
- Powder coated frame with wand/hose rack and accessory reel bracket
- 10" Pneumatic tires with tube
- * 3-Gallon chemical tank
- ◆ Built for years of dependable service

PRW25006HX \$1,592.99 REG \$1,873.99

				SPECI	FICATIONS				
PRODUCT NUMBER	PSI/BAR	GPM/LPM	HP	VOLTAGE/AN	IP/PHASE	HOSE LENGTH	PUMP MAX. Temp.	DIMENSIONS LX WX H	SHIP WEIGHT (LBS.)
HEAVY-DUTY	10:	- 17	(7) (5)				•	*	210
PRW3000KAR	3,000/207	4/15.2	7.5	23 0/3 4/1		50'	140° F	37" x 23-1/2" x 36"	240
HEAVY-DUTY GAS	POWERED						31	13	1077
PRODUCT NUMBER	PSI/BAR	GPM/LPM	нР	ENGINE	ENGINE FUEL Capacity (QT.)	HOSE LENGTH	PUMP MAX. Temp.	DIMENSIONS LXWXH	SHIP WEIGHT (LBS.)
PRW25006HX	2,500/172.5	3/11.4	6.5	Honda GX	3.9	50'	165° F	30" x 21-1/2" x 36"	108







SAVE \$18

ACP680V \$2,147.99 REG \$2,683.99

SINGLE-STAGE MEDIUM-DUTY AIR

ACP526VP \$739.99 REG \$923.99

COMPRESSOR

GP TWO-STAGE HEAVY-DUTY AIR COMPRESSOR

GP TWO-STAGE HEAVY-DUTY AIR COMPRESSOR ACP7580V \$2.895.99 REG \$3,215.99



G TWO-STAGE MEDIUM-DUTY AIR COMPRESSOR ACP560V \$1,499.99 REG \$1,873.99



G TWO-STAGE MEDIUM-DUTY AIR COMPRESSOR ACP6580V \$1,669.99 REG \$2,086.99









When you need air, you can rely on Mac Tools® air compressors. Compressors are built using stringent quality control standards. Every compressor is completely tested at full pressure. This, combined with the quality of the product, ensures your compressor will meet the task at hand. Some features that set Mac Tools® compressors apart are:

- 2-Year warranty on two-stage machines
- * ASME code air receivers
- · Auto tank drain standard on all heavy-duty two-stage
- "Trapped" valve design
- · Electric and recoil start standard on gas driven units
- · Valves are covered during warranty period
- All machines shipped "wet" ready-to-use
- Tested at full pressure before leaving factory

ARE YOU A G GENERAL USER OR A P POWER USER OF COMPRESSED AIR?

The 🕝 General User operates air tools occasionally performing tasks such as: inflating, blowing/cleaning, painting, light mechanical work and nailing/ stapling. The General User typically does not use compressed air as part of his/her livelihood. Air requirements of the tool being used and the available voltage determine which compressor is the best fit. Some Mac compressors better suited for the General Users are: ACP526VP, ACP660V, ACP560V and ACP6580V.

The Power User uses a good deal of air and typically relies on compressed air as part of his/her livelihood. Sanding, painting, grinding, wheel removal/ installation, fabrication and production are some of the applications of the Power User. Once air requirements have been determined, some of the better choices for the Power User might be: COMBI®, ACP3112D, ACP10120H, ACP7580V and ACP680V.

Whether you are a Power User or General User you must size your compressor according to the amount of cfm you will need. Refer to the compressor selection page to assist with proper sizing of your compressor.

	SPECIFICATIONS								
PRODUCT Number	НР	STAGE	TANK	AIR DELIVERY @ 100 PSI (ACFM)	YOLTAGE/ Phase/Fla	MAX Pressure (PSI)	RECOMMENDED Dryer		
ACP7580V	7.5	Two	80V	25.25	208-230/1/32	175	ACPHT25		
ACP680V	5	Two	80V	19.6	208-230/1/24	175	ACPHT20		
ACP10120H	10	Two	120H	37.23	208-230/460/3/32	175	ACPHT35		
ACP6580V	5	Two	80V	16	208-230/1/24	175	ACPHT20		
ACP560V	5	Two	60V	15.33	208-230/1/22	165	ACPHT20		
ACP660V	3.5	Single	60V	12.35	208-230/1/19	130	- 8		
ACP526VP	2	Single	26VP	7.1	115-230/1/15	130	=		
ACP520P	2	Single	20H	7.1	115-230/1/15	130	=0		

PRODUCT FEATURES	ACP S	CAID	AC 2850	Achae	ACP8	W 55.50	10 to
208-230V Baldor Motor		,					
208-230V Single Phase Thermally Protected Motor		-		-		•	
Automatic Start/Stop Control			5000 5000	•			
Fully Enclosed Belt Guard	-	•	-	•			•
ASME Code Tank and Safety Valve		-					
Automatic Tank Drain							
Magnetic Motor Starter							
Cast Iron Cylinder							





Whether your application is industrial, body shop, tire changing, field fleet maintenance, farm or repair shop, we have the right compressor for your application.

All air compressors are built by professionals for professionals in America and are 100% factory tested at full pressure before shipment. Our compressors are supported by an extensive network of over 350 factory authorized service centers across North America.

SPECIFICATIONS							
PRODUCT NUMBER	HР	STAGE	ENGINE	TANK (H)	AIR DELIVERY @ 100 PSI (ACFM)	MAX PRESSURE (PSI)	
ACP1 230GH	14	Two	Kohler	30	25.25	175	

PRODUCT Features	1CD TORA
12V Charging System	
Engine Slowdown	
Fully Enclosed Belt Guard	
ASME Code Tank/Safety Valve	
EZ Pull Cable Tank Drain	
Tank Discharge Valve	
Key Switch/Panel	
Low Oil Shutdown	
Cast Iron Cylinder	
Automatic Idle And Load Control	

AIR COMPRESSORS



GO HEAVY-DUTY TWO-STAGE, KOHLER GAS AIR COMPRESSOR

ACP1230GH \$2,803.99 REG \$3,504.99





DUPLEX AIR COMPRESSORS

Two pumps, two motors, one tank. If the first pump comes on but cannot meet the air demand, the second pump kicks on doubling the air output. The next time, the second pump kicks on first so you have equal run time between the two pumps. Built-in redundancy Alternator and starters pre-mounted and wired. Available in single phase power up to 15hp.

ACP3112DL \$5,455.99 REG \$6,818.99



SPECIFICATIONS								
PRODUCT NUMBER	HP	TANK(H)	AIR DELIVERY AT 100 PSI	VOLTA GE/P HASE/FLA	MAX PRESSURE (PSI)	RECOMMENDED DRYER		
ACP3112DL	15	120	50	208-230/1/64	175	ACPHT50		





TECHNICIAN SERIES WORKBENCHES





MAC TOOLS®/LISTA TECHNICIAN SERIES WORKBENCHES

Rugged design backed by limited lifetime warranty

Workbench drawers:

- · Capacity: 440 lbs. per drawer
- 100% Full extension
- · Fully welded drawer and handle (no rivets)
- Ergonomic and flush handles to housing (no catch points)
- · Ability to subdivide with partitions and dividers
- Premium non-slip mesh drawer liners
- Housings are fully welded heavy-duty construction and are 28.50" deep
- Stainless steel kick plates (removable) and fork truck capable base
- Stainless steel top over wood core is approx. 29" deep x 1.78" thick and is great for vise applications
- Stationary riser shelf for overhead cabinets come with stainless steel backsplash

Overhead Cabinets (OHC):

- OHC's are 19.70" h x 15" deep and include on adjustable shelf
- OHC's Include knockout holes on bottom and back, great for running cables
- OHC's bottom shelf is a reverse pan base design which is allows for hiding wires and cables
- All locks have removable core and are keyed alike for bench setup.
- Premium powder coat paint finish
- . Monitor and keyboard not included



800.MACTOOLS | www.mactools.com

COLORS WITH SILVER TRIM



follow us on twitter

Disclaimer: Items shown are available for a limited time only and are subject to availability through your participating Mac Tools® Distributor, Franchisee or Sales Representative. Prices reflect suggested list price and are subject to change without notice. Printed colors may differ slightly from the actual color. Mac Tools® is not responsible for typographical or photographic errors. In Canada, all taxes are extra and are not included in the prices shown.